



Model : HNS7

Features

- ▶ Separate Moisture from Compressed Air
- ▶ Very Low Pressure Drop
- ▶ Easy Replaceable Filter Element
- ▶ Reducing Operating Cost
- ▶ Differential Pressure Gauge for Service Life

Technical Specification

Model	HNS7
Size	1/2" to 2.1/2"
Element	1 Micron
Element Life	Maximum 1 Year / Depending on the use (Replaceable)
Efficiency	0.1 ppm w/w maximum
Design Pressure	0 - 10 Kg/cm ²
Temperature	50 °C
Spares	Spare Element Available
Media	Compressed Air
Minimum Distance Required	6 mtrs. after Air Compressor / Air Receiver Tank
Moisture Drainage	Manual / Mechanically operated Automatic Drain Valve

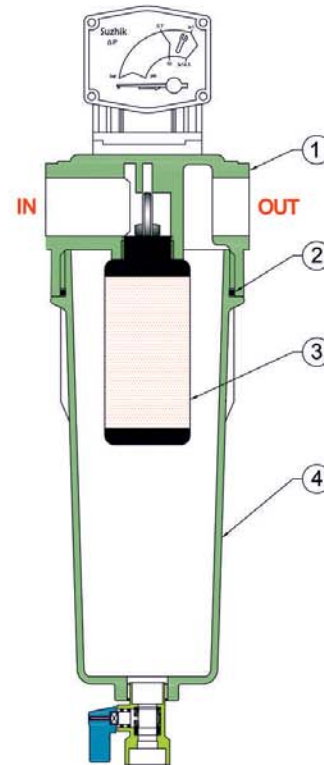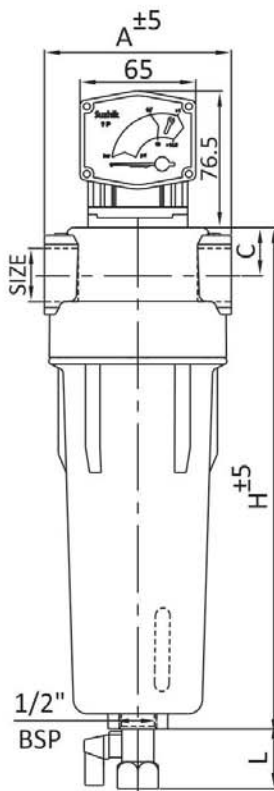

Dimensions : (All Dimensions are in mm)

MODEL	SIZE	CFM	A	H	C	L	Weight (Kg.) Approx.
HNS7-2-15	1/2"	71	105	285	27	33	1.450
HNS7-2-20	3/4"	71	105	285	27	33	1.400
HNS7-2-25	1"	71	105	285	27	33	1.350
HNS7-6-40	1.1/2"	212	123	485	36	33	5.350
HNS7-13-50	2"	459	135	610	39	33	8.000
HNS7-25-65	2.1/2"	883	369	1240	40	33	60.000

No.	Part Name	Material
1	Body	Aluminum Pressure Die Cast
2	'O' Ring	NBR
3	Filter Element	Synthetic Fiber
4	Bowl	Aluminum / C. S. Powder Coated